

The answers to landline SMS withdrawal



# GSM-SW-SC

GSM unit in plastic housing

The **GSM-SW-SC** is supplied with a pre-fitted World SIM that will **only** work with that device. The unit allows the user to control the panel or receive events via **SecureComm**, the **HKC** cloud service. **SecureComm** provides a heartbeat (polled) connection option to the unit which will signal a loss of communication in the event of an interruption in the GPRS signal.\*

All alarms and alerts are notified to the user via the Smartphone APP (audible and text)\*. The unit comes with a comms card and plastic box and can be located away from the main panel for ideal signal strength.


- Control your system via APP and/or SMS text commands
- Heartbeat monitoring
- Quiescent Current: 70mA
- Transmit Current: 145mA
- Temperature: -10 to +40°C
- Weight: 470g
- Size: 236 x 166 x 42mm
- EN 50136-1, Category S2, Class II

- Connects to **SW-812**, **SW-1212** and **SW-16120** panels
- Software compatibility is as follows:  
**SW-812** V7.32 (i.e. around Jan. 2006) or later  
**SW-1212** V7.32 (i.e. around Jan. 2006) or later  
**SW-16120** V2.0 (i.e. around Sep. 2006) or later
- Works with our smartphone app
- Pre-fitted with **SecureComm** data World SIM card
- Alarm reports from your system via smartphone app and/or SMS text messaging



\*Dependent on network provider and smartphone settings

**SecureComm** World SIM

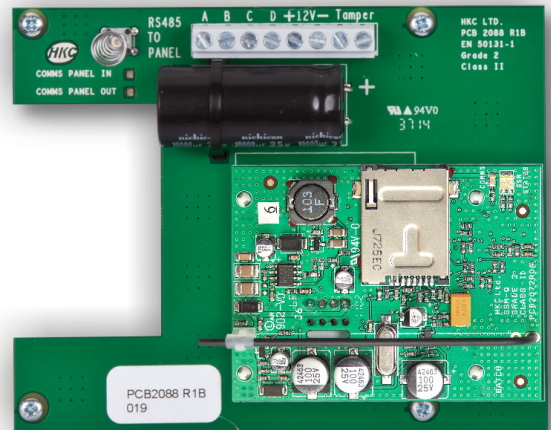

www.hkcsecurity.com

Safe & Secure

# Security